



OR-100


All-in-one Vet Endoscopy System



A Better Platform for Endoscopy

Motus 4.0

- Higher data processing capacity
- Full digital image processing
- High integration
- Variety of interfaces
- Powerful algorithm
- Over-the-Air upgrade

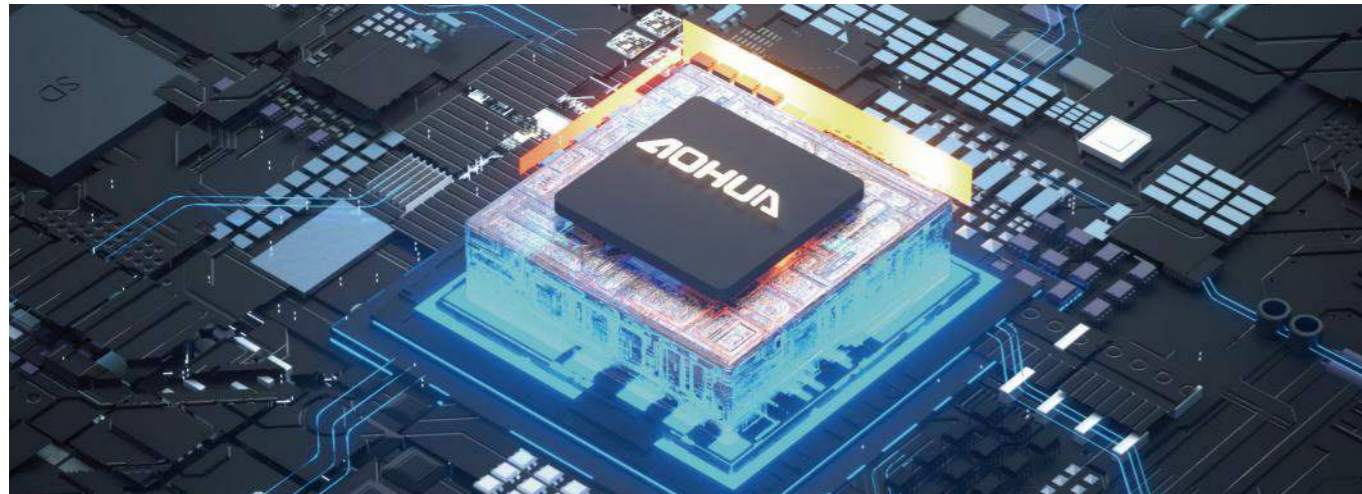

Intergraded P.I.M.S.

- Patient information input: such as external keyboard, navigation keys, and hospital internal network.
- Individual patient folders: the diagnosis and treatment data, including diagnostic photos, videos, and patient reports, are stored in individual patient folders.
- Patient information transmission: the patient information can be transmitted through multiple channels, such as SD cards, USB flash drives, and HIS/Dicom.
- Patient information management system: this system optimize the veterinary workflow and improve the efficiency of endoscopic surgeries.

Patient Folders: Represented by a folder icon and a hand holding a small animal paw.

Management System: Represented by a document icon and a hand interacting with a digital interface.

Network Interface: Represented by a globe icon and a network port on a device.

Multiple Storage: Represented by a USB icon and a storage device.

Intelligent LED Light Source

CBI

CBI Regular / CBI-R

Compound band imaging technology utilizes tissue characteristics to examine digestive tracts during endoscopy.

HbE

Normal

Image processing

Hemoglobin Enhancement

HbE function displays blood and highlights possible blood supply direction in affected tissues during endoscopy.

ENH

Normal

Edge enhancement

Structure enhancement


Composite enhancement

Powerful algorithms enhance image details in three modes for easier clinical observation and diagnosis.

An Easier Diagnosis for Endoscopy

Full HD Screen Monitor

- 15.6" large screen size, capable of displaying patient information, device status information, and real-time images simultaneously.
- Provides enhanced viewing experience with full HD and high-color fidelity, allowing for easy visualization of small details and structures.

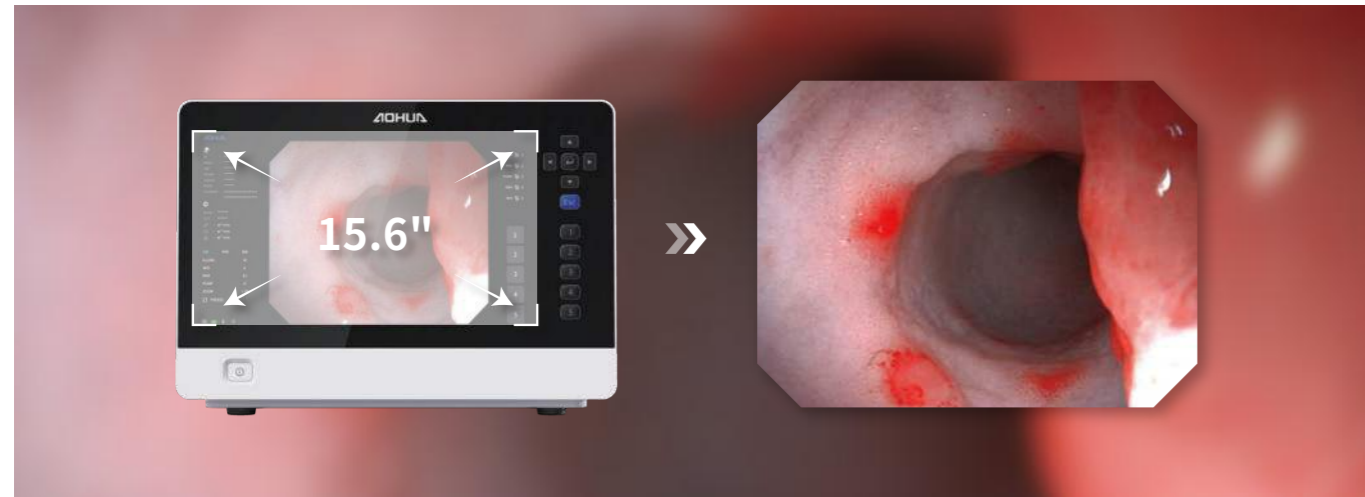


Friendly Operation

- Image selection feature: Easily capture and view important details by freezing images.
- On screen menu: Access functions, patient information, user settings, and system settings easily through the menu.
- Customizable buttons: Allow users to assign functions to buttons according to their preferences, providing an efficient user experience.



Customized Shortcuts

- User presets: Users can save and apply personalized settings with one click, meeting the needs of multiple user scenarios.
- Video/Audio Recording: Allows for the recording of video and audio, including the doctor's voice, for better use in teaching and educational purposes.

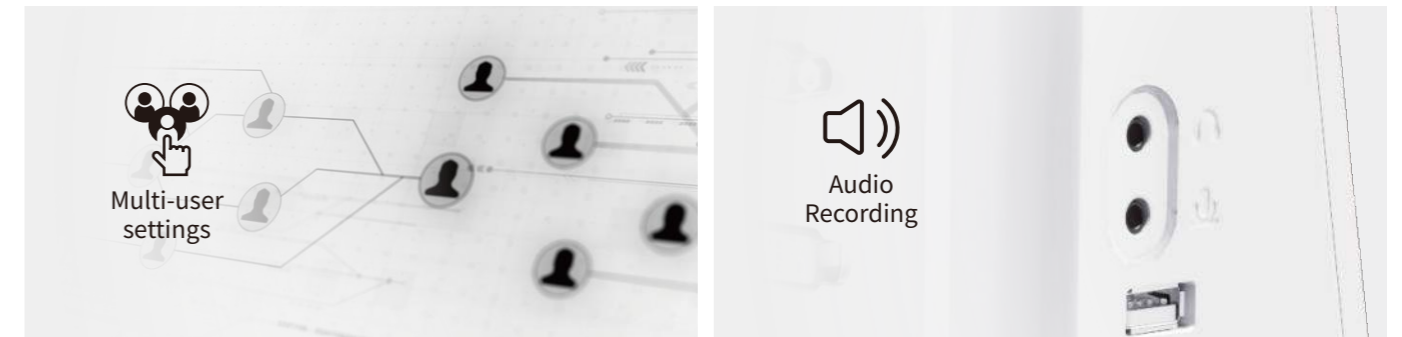


Work with Both Flexible and Rigid Endoscopes

- Compatibility: Designed to be compatible with both rigid and flexible endoscopes, making it suitable for various veterinary applications. Also compatible with all VET series flexible and rigid endoscopes.
- Hot-swappable: Allows for easy and convenient swapping of flexible and rigid endoscopes while sharing the same port.

Flexible Endoscope




Rigid Endoscope

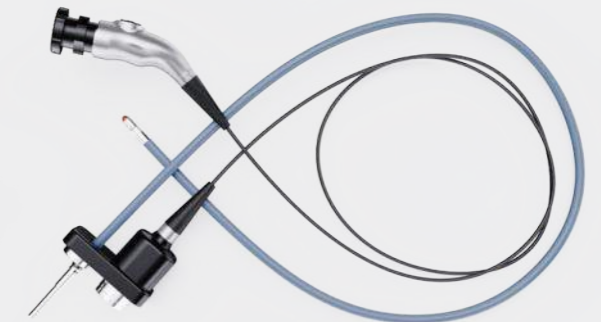


Full HD Flexible Video Endoscopy System


The "VET-FHD" series of veterinary full high-definition endoscopes uses a full high-definition sensor, providing excellent image quality, optimized depth of field and viewing angle, helping veterinarians to see more clearly and diagnose more accurately during endoscopic surgeries.

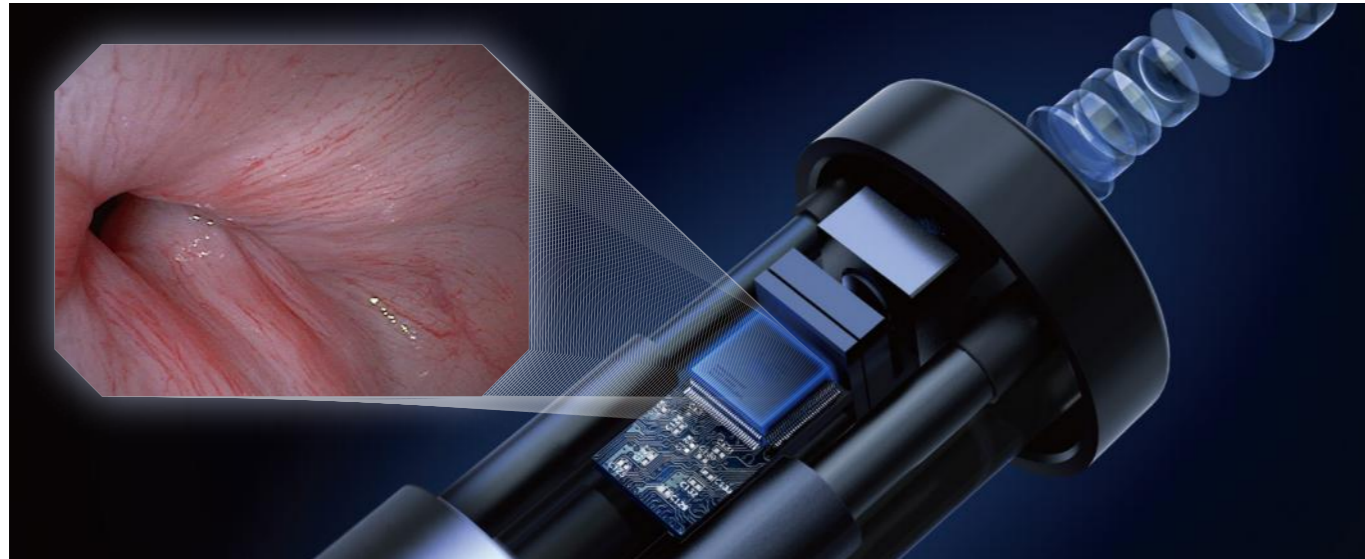


Canine

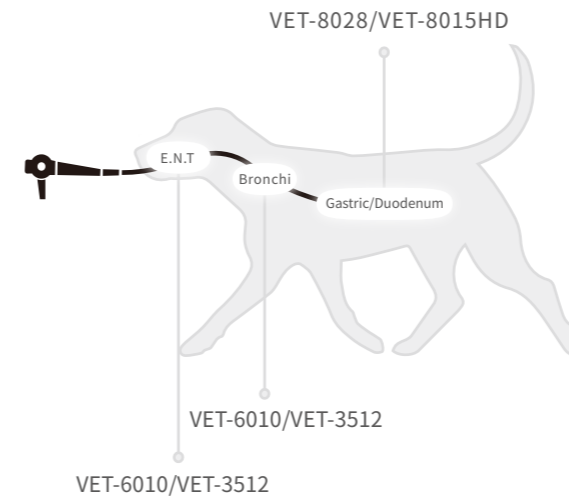


Feline

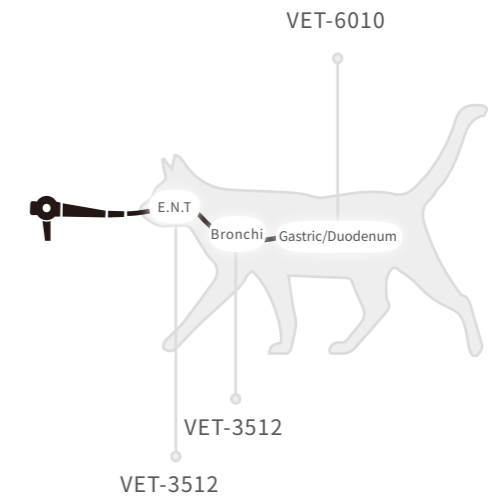

Equine

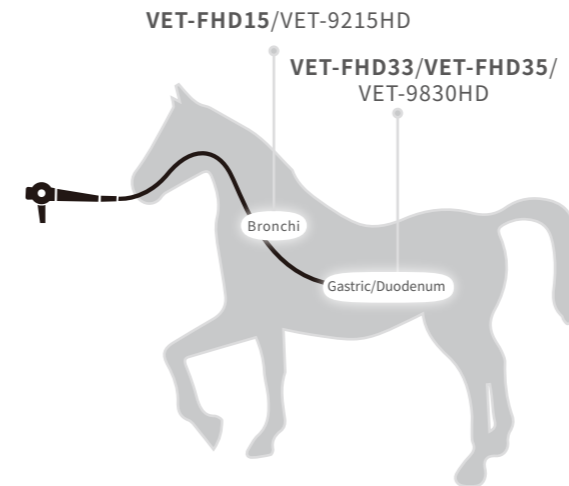

Dolphins

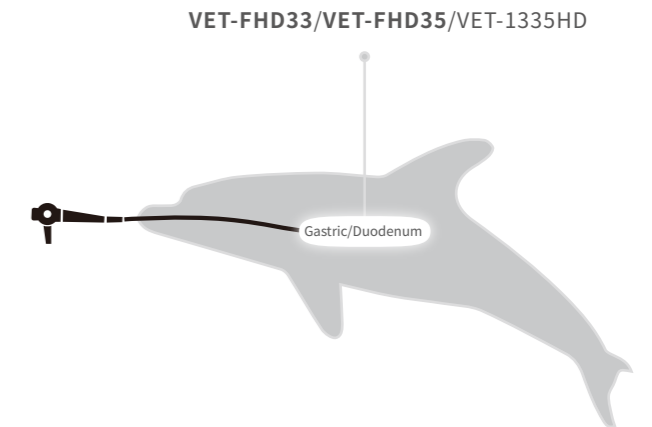

Specification

Model	Working Length	Diameter of Insertion tube	Diameter of Instrument	Auxiliary Water Inlet	Range of Bending	Resolution	Depth	View of Field
VET-FHD15	1500	9.8	2.8	Yes	U210°D90°L100°R100°	1920x1080	2-200	145°
VET-FHD33	3300	9.8	2.8	Yes	U210°D90°L100°R100°	1920x1080	2-200	145°
VET-FHD35	3500	12.8	3.7	Yes	U180°D180°L160°R160°	1920x1080	2-200	145°
VET-8015HD	1500	8.5	2.0	No	U210°D90°L100°R100°	1280x720	3-100	140°
VET-9215HD	1500	9.0	2.8	No	U210°D90°L100°R100°	1280x720	3-100	140°
VET-9833HD	3300	9.6	2.8	No	U210°D90°L100°R100°	1280x720	3-100	140°
VET-1335HD	3500	12.8	3.7	No	U180°D180°L160°R160°	1280x720	3-100	140°
VET-3512	600	3.5	1.2	No	U160°D130°	400x400	2-50	120°
VET-6010	1000	6.0	2.2	No	U210°D90°L100°R100°	400x400	2-50	120°
VET-8028	1500	8.0	2.8	No	U210°D90°L100°R100°	800x800	2-50	120°

